

LP-2330 PoE AND ETHERNET SEGMENT EXTENDER



The LP-2330 PoE and Ethernet Segment Extender allows for extension of Ethernet Segments and Power over Ethernet beyond the normal 100 meter maximums. Connect the Network Segment to be extended into Port 1. The connection must be from an Ethernet Switch. The Switch may be PoE enabled or Midspan PoE may also be used. The IP Data and PoE Power are then forwarded out of Port 2 to the next LAN cable Segment for extension. Maximum extension is 100 meters. Multiple LP-2330 Extenders may be used, up to a maximum of 1,100 meters (10 Units). Port 3 is a local data only port. A laptop computer may be attached at port 3 allowing for local connection to the Network for monitoring or adjustments to local devices such as IP Cameras. See Installation diagram above.

If using 3 or more Extenders (LP-2330 and/or LP-2350), the PoE power must be renewed. Use optional external power supply (LP-2300PSU) to boost PoE power with every 3rd POE and Ethernet Segment Extender installed. End devices may be either a single device, such as an IP Camera or a local Ethernet Switch to provide multiple DATA only port connections. (Up to 100Mbps)


For further information or product specifications, consult the LP-2330 PoE and Ethernet Segment Extender Datasheet which is available at www.lan-power.com

 **LAN-POWER**
Flexibility, Simplicity and Value ...

Telephone: (510) 275-4572

Rev 12-12

LP-2330 PoE AND ETHERNET SEGMENT EXTENDER

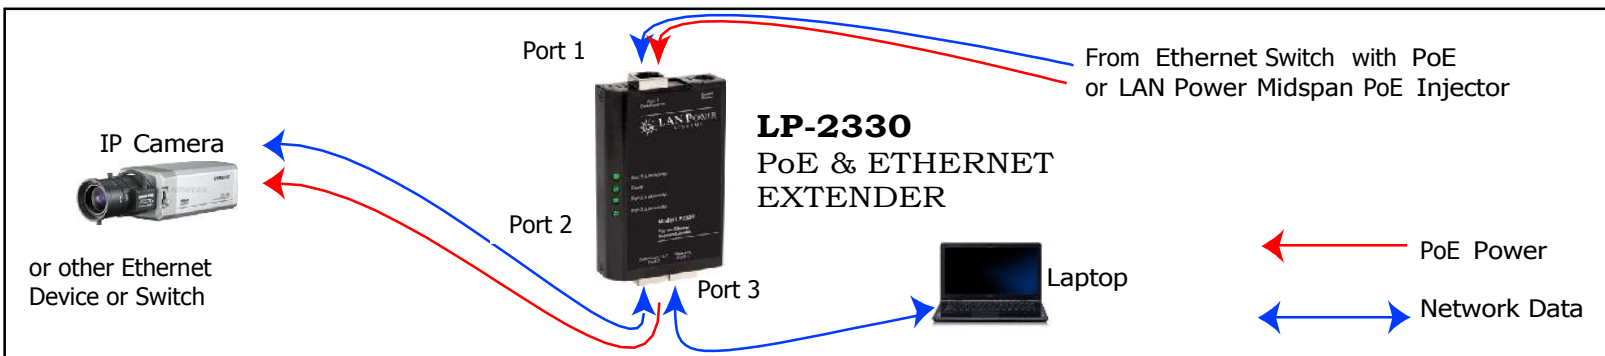

The LP-2330 PoE and Ethernet Segment Extender allows for extension of Ethernet Segments and Power over Ethernet beyond the normal 100 meter maximums. Connect the Network Segment to be extended into Port 1. The connection must be from an Ethernet Switch. The Switch may be PoE enabled or Midspan PoE may also be used. The IP Data and PoE Power are then forwarded out of Port 2 to the next LAN cable Segment for extension. Maximum extension is 100 meters. Multiple LP-2330 Extenders may be used, up to a maximum of 1,100 meters (10 Units). Port 3 is a local data only port. A laptop computer may be attached at port 3 allowing for local connection to the Network for monitoring or adjustments to local devices such as IP Cameras. See Installation diagram above.

If using 3 or more Extenders (LP-2330 and/or LP-2350), the PoE power must be renewed. Use optional external power supply (LP-2300PSU) to boost PoE power with every 3rd POE and Ethernet Segment Extender installed. End devices may be either a single device, such as an IP Camera or a local Ethernet Switch to provide multiple DATA only port connections. (Up to 100Mbps)

For further information or product specifications, consult the LP-2330 PoE and Ethernet Segment Extender Datasheet which is available at www.lan-power.com

 **LAN-POWER**
Flexibility, Simplicity and Value ...

Telephone: (510) 275-4572

Rev 12-12